


Performance comparisons and perceptions of noise reduction

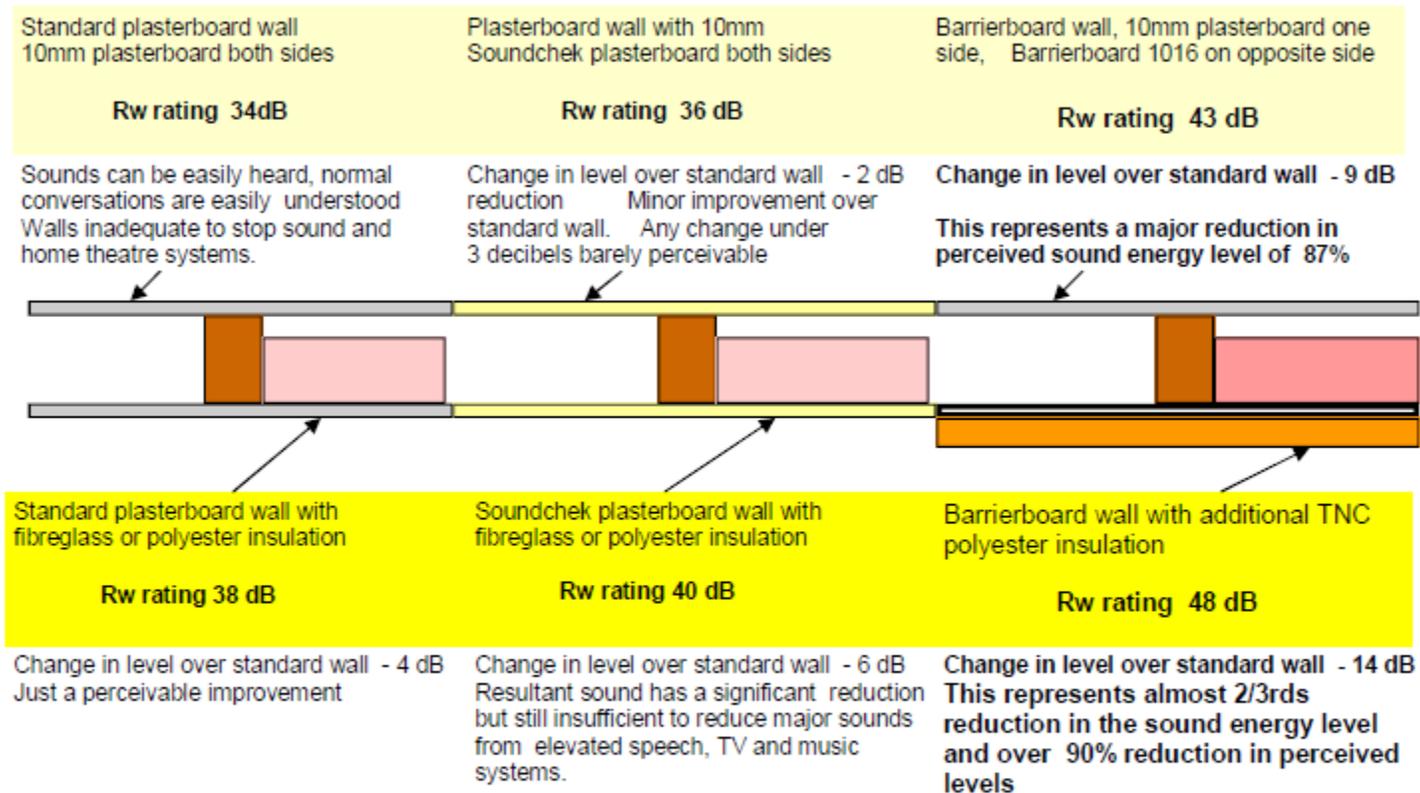

For an independent assessment of Decibel reductions and the subjective perception of noise levels, refer to the Multi Residential Timber Framed Construction information contained in Information Bulletin No. 3 www.timber.org.au/mrtfc website.

Performance of the above configurations for plasterboard and Soundchek Has been taken from the CSR Red book. Barrierboard information from CSIRO test reports All studs configurations are 90mm timber studs